

Article No. : 6SL3220-1YE12-1AP0



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

Input

Number of phases	3 AC	
Line voltage	380 ... 480 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
Rated voltage	400V IEC	480V NEC
Rated current (LO)	2.80 A	2.70 A
Rated current (HO)	2.10 A	2.00 A

Output

Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC¹⁾
Rated power (LO)	1.10 kW	1.50 hp
Rated power (HO)	0.75 kW	1.00 hp
Rated current (LO)	3.10 A	3.00 A
Rated current (HO)	2.20 A	2.10 A
Rated current (IN)	3.20 A	
Max. output current	3.40 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)	
110% base load current IL for 60 s in a 300 s cycle time	
High Overload (HO)	
150% x base load current IH for 60 s within a 600 s cycle time	

General tech. specifications	
Power factor λ	0.70 ... 0.85
Offset factor cos φ	0.96
Efficiency η	0.97
Sound pressure level (1m)	55 dB
Power loss ³⁾	0.055 kW
Filter class (integrated)	RFI suppression filter for Category C2
EMC category (with accessories)	Category C2
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7-1500F)

Communication

Communication PROFIBUS DP

Inputs / outputs

Standard digital inputs	
Number	6
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA
Fail-safe digital inputs	
Number	1
Digital outputs	
Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0
Analog / digital inputs	
Number	2 (Differential input)
Resolution	10 bit
Switching threshold as digital input	
0 → 1	4 V
1 → 0	1.6 V
Analog outputs	
Number	1 (Non-isolated output)
PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy ±5 °C	

Closed-loop control techniques	
V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No


Communication PROFIBUS DP

SIEMENS

Data sheet for SINAMICS G120X

Article No. : 6SL3220-1YE12-1AP0

Ambient conditions		Mechanical data	
Standard board coating type	Class 3C2, according to IEC 60721-3-3: 2002	Degree of protection	IP20 / UL open type
Cooling	Air cooling using an integrated fan	Frame size	FSA
Cooling air requirement	0.005 m ³ /s (0.177 ft ³ /s)	Net weight	3.4 kg (7.50 lb)
Installation altitude	1,000 m (3,280.84 ft)	Dimensions	
Ambient temperature		Width	73 mm (2.87 in)
Operation	-20 ... 45 °C (-4 ... 113 °F)	Height	232 mm (9.13 in)
Transport	-40 ... 70 °C (-40 ... 158 °F)	Depth	218 mm (8.58 in)
Storage	-25 ... 55 °C (-13 ... 131 °F)	Standards	
Relative humidity		Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible	CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
Connections			
Signal cable		Converter losses to IEC61800-9-2*	
Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)	Efficiency class	IE2
Line side		Comparison with the reference converter (90% / 100%)	31.3 %
Version	screw-type terminal		
Conductor cross-section	1.50 ... 2.50 mm ² (AWG 16 ... AWG 14)		
Motor end			
Version	Screw-type terminals		
Conductor cross-section	1.50 ... 2.50 mm ² (AWG 16 ... AWG 14)		
DC link (for braking resistor)			
PE connection	On housing with M4 screw		
Max. motor cable length			
Shielded	150 m (492.13 ft)		

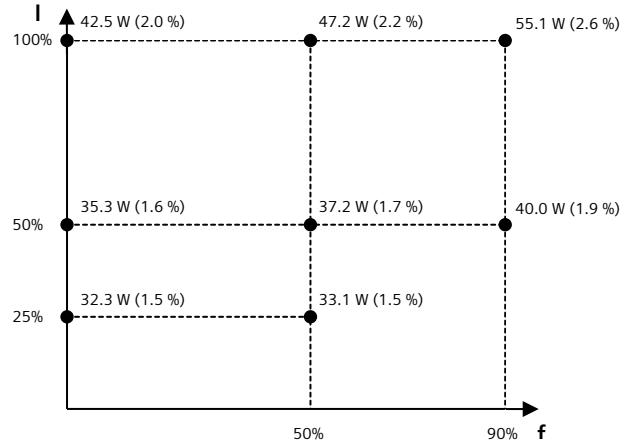

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V

²⁾Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.

Article No. : 6SL3220-1YE12-1AP0

I/O Extension Module

Inputs / outputs		Mechanical data	
Digital inputs		Dimensions	
Number of digital inputs ¹⁾	2	Width	71 mm (2.80 in)
Conductor cross-section	0.5 ... 1.5 mm ² (AWG 21 ... AWG 16) Alternatively 2 x 0.5 mm ²	Height	117 mm (4.61 in)
Input voltage (0→1)	11 V	Depth	27 mm (1.06 in)
Input voltage (1→0)	5 V		
Input voltage, max.	30 V		
Digital outputs			
Number of digital outputs	4		
Conductor cross-section	1.5 mm ² (AWG 16)		
Output current ²⁾	2 A		
Analog inputs			
Number of analog inputs ³⁾	2		
Conductor cross-section	0.5 ... 1.5 mm ² (AWG 21 ... AWG 16) alternatively 2*0.5 mm ²		
Current	0 ... 20 mA		
Analog outputs			
Number of analog outputs	2		
Type of analog outputs ⁴⁾	Non-isolated output		
Conductor cross-section	0.5 ... 1.5 mm ² (AWG 21 ... AWG 16) Alternatively 2 x 0.5 mm ²		
Output voltage	0 ... 10 V		
Output current	0 ... 20 mA		

¹⁾DI 6: digital input; DI 7: P or M switch; DI COM: Input for Control Unit interface (24 V out, max. 250 mA)

²⁾The max. current depends on the temperature and the size of the connected converted. It varies between 2 A and 3 A at 30 V DC.

³⁾2 analog inputs for the connection of Pt1000/Ni1000 temperature sensors. One of which can be optionally used as analog input.

⁴⁾Switchable between voltage (0 ... 10 V) and current (0 ... 20 mA) using a parameter