

Article No. : 6SL3210-1KE18-8AF1



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

Input

Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz
Rated current (LO)	11.40 A
Rated current (HO)	10.60 A

Output

Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC ¹⁾
Rated power (LO)	4.00 kW	5.00 hp
Rated power (HO)	3.00 kW	4.00 hp
Rated current (LO)	8.80 A	
Rated current (HO)	7.30 A	
Rated current (IN)	9.00 A	
Max. output current	14.60 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 240 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)
150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time
High Overload (HO)
200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time

General tech. specifications

Power factor λ	0.70 ... 0.85
Offset factor $\cos \varphi$	0.95
Efficiency η	0.97
Sound pressure level (1m)	52 dB
Power loss	124.0 W
Filter class (integrated)	Class A

Communication

Communication	PROFINET, EtherNet/IP
---------------	-----------------------

Inputs / outputs

Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs

Number	1
--------	---

Digital outputs

Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A

Analog / digital inputs

Number	1 (Differential input)
Resolution	10 bit

Switching threshold as digital input

0→1	4 V
1→0	1.6 V

Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5^\circ\text{C}$

Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE18-8AF1

Ambient conditions

Cooling	Air cooling using an integrated fan
Cooling air requirement	0.005 m ³ /s (0.177 ft ³ /s)
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	----------------------------------------------------------------

Connections

Signal cable

Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)
-------------------------	------------------------------------------------------

Line side

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)

Motor end

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)

DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm ² (AWG 18 ... AWG 14)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

Max. motor cable length

Shielded	50 m (164.04 ft)
Unshielded	150 m (492.13 ft)

Mechanical data

Degree of protection	IP20 / UL open type
Frame size	FSA
Net weight	1.70 kg (3.75 lb)

Dimensions


Width	73 mm (2.87 in)
Height	196 mm (7.72 in)
Depth	208 mm (8.19 in)

Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	33.8 %

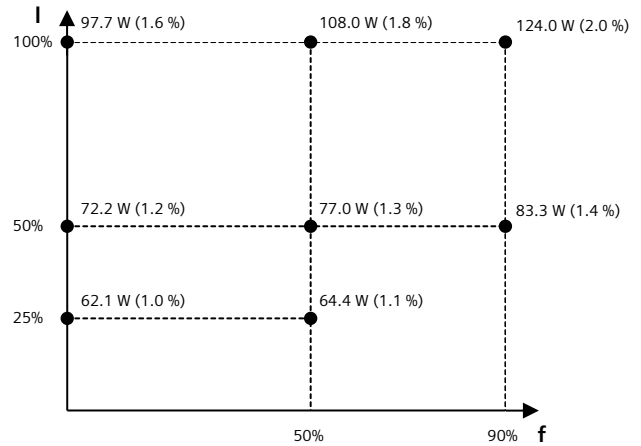

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V