

## MD200 AC Drive

### Open loop, general purpose, compact drive

#### Features & Functions


- Open loop V/F & SVC
- Starting torque 150% at 3 Hz in SVC mode
- Modbus RTU or CANlink<sup>1</sup>
- Automatic torque boost
- Slip compensation
- Easy startup with simplified parameters
- 2 Independent S-ramps
- Flexible programmable I/Os
- Variable DC injection braking
- Comprehensive diagnostics
- Output frequency: 500 Hz
- Built-in dynamic braking unit

**NEW**

Wide operating voltage  
 Single-phase 200 to 240 Vac  
 0.4 to 2.2 kW  
 Three-phase 380 to 480 Vac  
 0.4 to 3.7 kW



**E467465**  
**IND.CONT.EQ**



**NEW**

Internal EMC filter (Category C3)

Complies with EN61800-3  
 Category C2  
 2<sup>nd</sup> Environment  
 (with external EMC filter)

**NEW**

PM motor control (special version)<sup>1</sup>


Operation in high ambient temperatures  $\leq 50^{\circ}\text{C}$   
 Please note: If operating above  $40^{\circ}\text{C}$ , derating is required

Enhanced reliability and protection against humidity and dust pollution with class 2 conformal coating (resistant to 3C2 and 3S2 environments).


Onboard comms  
 Modbus RTU (optional  
 CANlink)<sup>2</sup>

**NEW**


Flexible installation modes



Side-by-Side




Wall Mounted

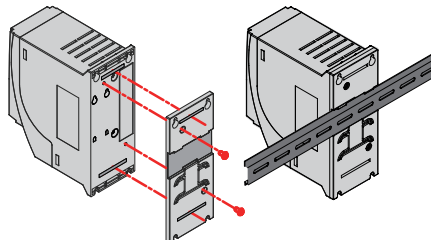

DIN rail mounted



CANlink speed sync.

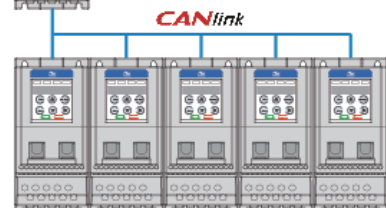

Notes:  
<sup>1</sup> Consult with Inova Automation.  
<sup>2</sup> CANlink is Inovance's proprietary serial comms.


# General Specifications

Voltage Class		Single-phase 220 Vac				Three-phase 400 Vac					
Drive Model: MD200xxxxB-INT		S0.4B	S0.75B	S1.5B	S2.2B	T0.4B	T0.75B	T1.5B	T2.2B	T3.7B	
Dimension	Height Width Depth	[H1]: 180 mm [W]: 75 mm [D]: 145 mm				[H1]: 180 mm [W]: 75 mm [D]: 145 mm					
Drive Input	Rated input voltage	Single-phase 200 to 240 Vac -15% to +10%				Three-phase 380 to 480 Vac -15% to +10%					
	Rated input current [A]	6.5	11.0	18.0	27.0	2.6	4.5	5.5	6.5	11	
	Power capacity [kVA]	1.7	3.0	4.8	7.1	1	1.5	3.0	4.0	5.9	
	Rated input frequency	50/60 Hz $\pm 5\%$ (47.5 to 63 Hz)									
Drive Output	Applicable motor	[kW]	0.4	0.75	1.5	2.2	0.4	0.75	1.5	2.2	3.7
		[HP]	0.5	1	2	3	0.5	1	2	3	5
	Output Current [A] <sup>3</sup>	2.6	4.6	8	11	1.8	3.4	4.8	5.5	9.5	
	Overload Capacity	150% for 60 s & 180% for 3 s									
	Max. output voltage	200 to 240 Vac (proportional to input voltage)				380 to 480 Vac (proportional to input voltage)					
	Max. output frequency	500 Hz									
Braking Resistor	Recommended power [kW]	80	80	100	100	150	150	250	300	400	
	Recommended resistance [ $\Omega$ ]	$\geq 200$	$\geq 150$	$\geq 100$	$\geq 70$	$\geq 300$	$\geq 300$	$\geq 220$	$\geq 200$	$\geq 130$	
Enclosure <sup>*4</sup>		IP20									


<sup>\*3</sup> Rated output current at a carrier frequency of 6 kHz.

<sup>\*4</sup> All units are fan cooled.

# General Connection Diagram

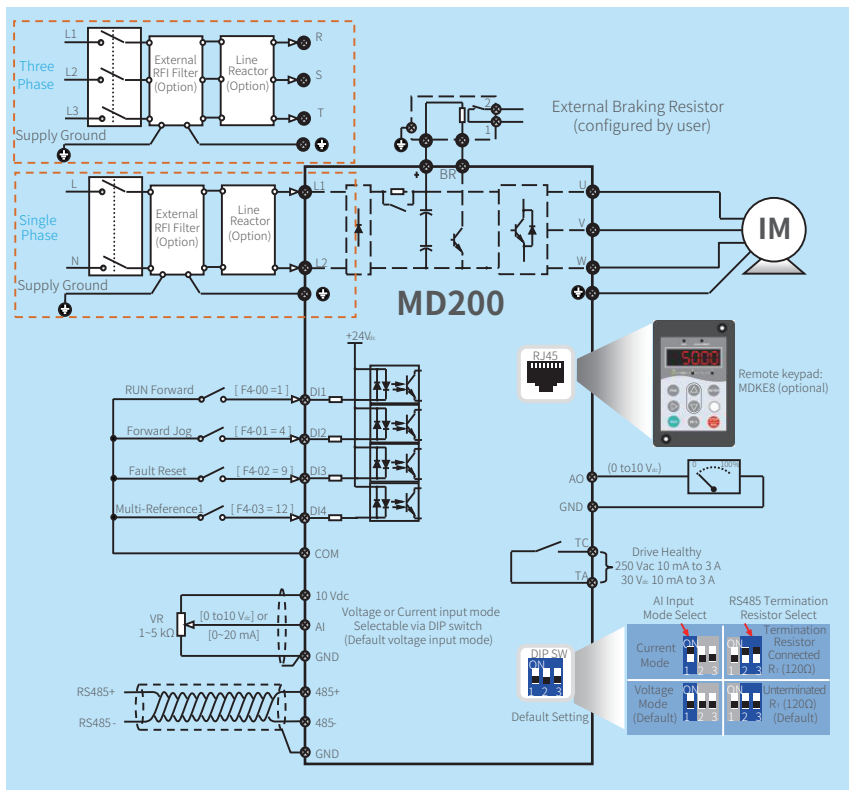

# Dimensions

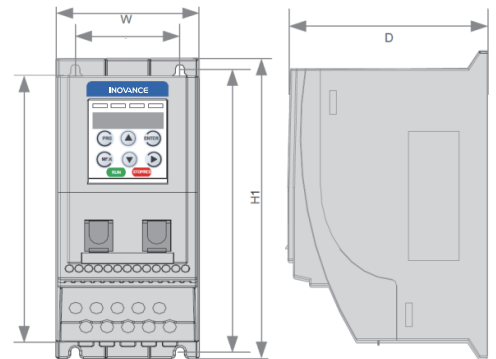

# Remote Keypad MDKE8 (optional)



- Model:** MDKE8 (LED type)
- Dimension:** 116 H x 76 W x 40 D (mm)
- Protection level:** IP20
- Matching cable model**  
MDCAB 3.0 m (included)
- Potentiometer (single turn)